


Ag	Cu	Ni	Sn
----	----	----	----

Shieldex® Textile Conducting Paths

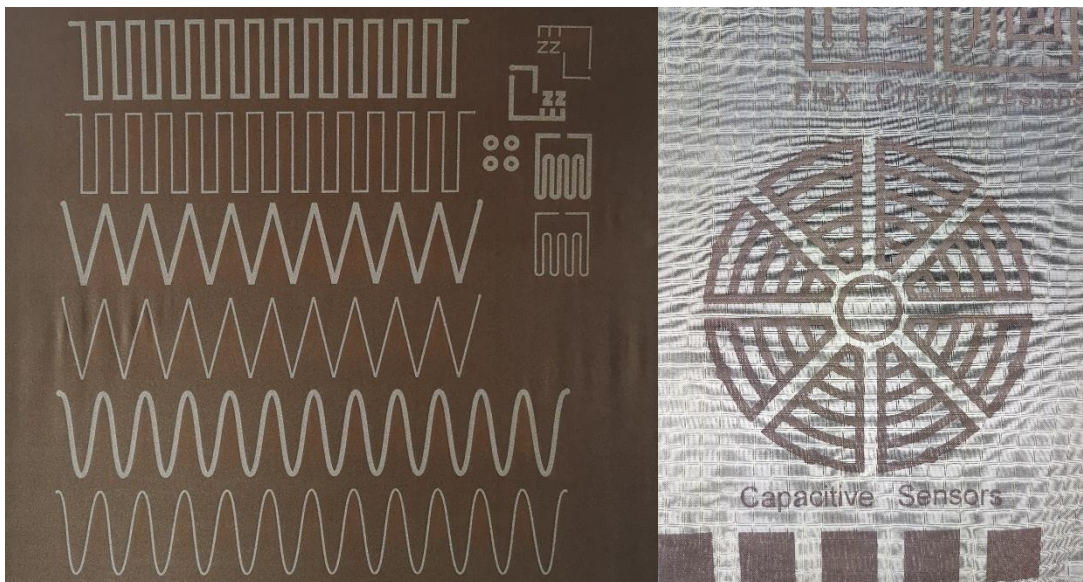

Metallized Shieldex® textiles are very flexible, highly electrically and thermally conductive, robust, extremely lightweight, and washable. These properties make Shieldex® products ideal for technical applications where selected textile structures get metallized.

Possible Structures

- Antenna systems
- Capacitive sensors
- Heating systems
- Bus line systems

Properties

- The desired design is completely plated
- Customized specifications are possible
- Stretchable in both directions
- Non-elastic base material also possible
- Design guarantees a full functionality from both sides
- Every geometry is possible
- Up to 1.30 m wide, depending on base material
- Maximum template length: 82 cm
- Minimum trace thickness: 2 mm
- MOQ: 10 x A3 samples
- Requires a vector file (at least 2.54 mm)

Features

- Low electrical resistance
 - High durability
 - Washable
 - Stretchable
 - Fine pitch
 - Adhesive and coating options
 - VAS: sensor, die cutting, lamination, wire and LED connection
-

- Benefits**
- High performance
 - Long term reliability
 - Antimicrobial
 - Shielding
 - Signal / wire pattern
 - Flexible / Conformable circuit
 - Thin and lightweight

Specifications	Typical properties	Features	Test method
	Thickness	0.55 ± 15 %	
	Service temperature	-30 to 90 °C	
	High temperature <small>short term</small>	150 °C/20 min	
	Trace Resistance		
	Original	< 4 Ω/mm width	
	20 x 20 % stretch cycle	No change	4 points <small>trial/10 mm length</small>
	1 x 50 % stretch cycle	No change	
	Trace width	> 2 mm	
	Abrasion	> 38.000 cycles	ISO 1297-1
	Metal Adhesion	> 5	AATCC 8-2007
	Folding	> 500.000 cycles	ISO 32100:2011
	Washing	> 30 cycles	DIN 6330:2012

- Markets**
- Wearable**
 - Low amperage flex circuit
 - Smart Clothing sensor
 - Handset**
 - Flex circuit
 - Consumer**
 - LED
 - IOT**
 - Automotive**
 - Sensors
 - LED
 - Military**
 - Shielding

Aerospace

- Camouflage
- Lightweight circuit

Medical

- Sensors
-

How to proceed

1. Get in touch with Statex
 2. Send the custom design to Statex as eps file with at least 150 dpi
 3. Select Shieldex® base material in personal customer service. After consultation custom polyamide base material is possible as well.
-

Did we spark your interest ?

More information can be found on our detailed data sheets.
Please do not hesitate to contact us at any time.