

# Technical Data Sheet

## LS-10220



### Description


- Flexible, low density, high loss, carbon impregnated foam.
- LS-10220 comes with a top coat of acrylic sealant
- Available with pressure sensitive adhesive (PSA).
- Can be water-jet cut for custom configurations.
- RoHS and REACH compliant.

### Physical Properties

<u>Properties</u>	<u>Value</u>
Sheet Thickness	0.75" (1.91 cm)
Standard Sheet Size	24" x 24" (60.96 x 60.96 cm) Other sheet sizes available upon request.
Color	Black

### Electrical Properties

<u>Frequency</u>	<u>Typical Insertion Loss</u>
10 GHz	-39 dB

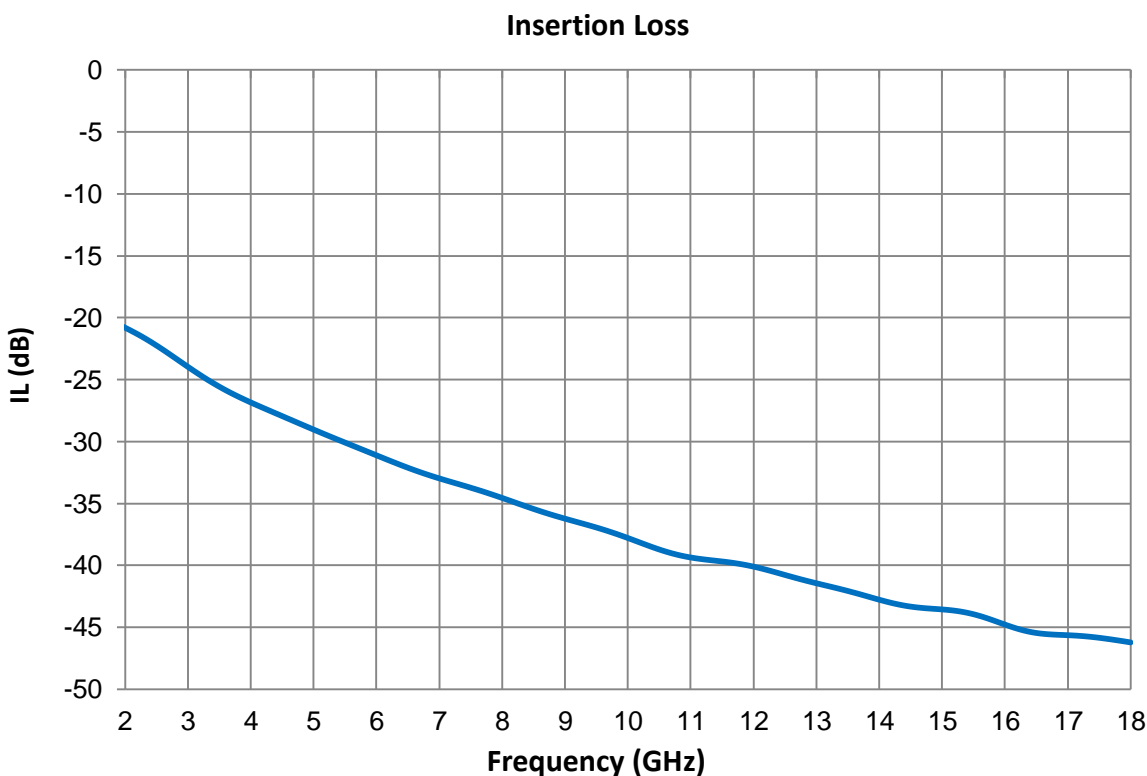

Note: the information provided is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.