

Technical Data Sheet

RT-10003



Description

- Flexible, low density, high loss, carbon impregnated reticulated foam.
- Available with PSA, surface coating, or ground plane.
- Can be water-jet cut for custom configurations.
- RoHS and REACH compliant.


Physical Properties

Properties	Value
Sheet Thickness	1.00" (2.54 cm)
Standard Sheet Size	24" x 24" (60.96 x 60.96 cm) Other sheet sizes are available upon request.
Color	Black

Electrical Properties

Frequency	Typical Reflection Loss
6 – 18 GHz	≤ -20 dB

Reflection Loss of RT-10003

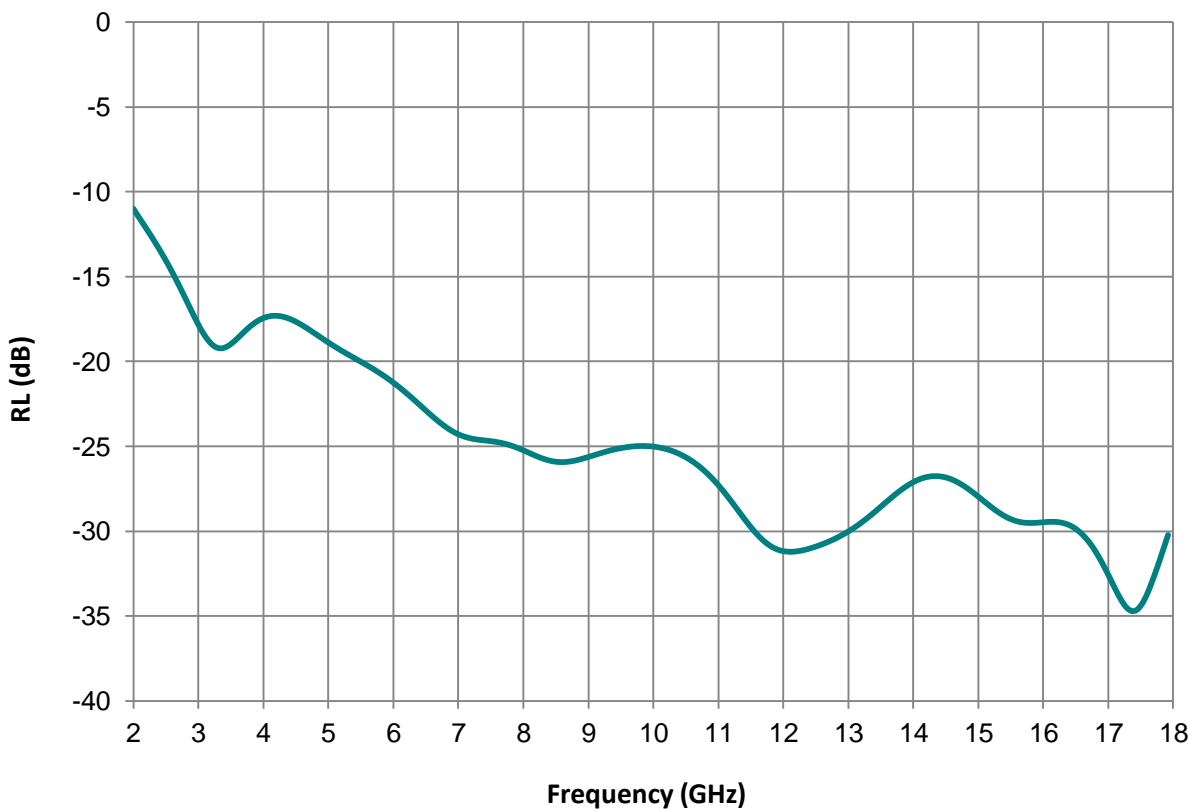

Note: the information provided is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.

Supplied by:
www.hitek-ltd.co.uk
+44 (0)1724 851678

HITEK
ELECTRONIC MATERIALS LTD