

Technical Data Sheet

UD-11901-3




Description


- Flexible, broadband, loaded, urethane, rubber magnetic absorber.
- Tuned for mode suppression in an enclosed cavity, signal isolation and surface current attenuation
- Standard Sheet Size:
 - 12" x 12" (30.48 cm x 30.48 cm)
 - Custom sheet sizes available upon request.
- Prepared with pressure sensitive adhesive (PSA)
- Can be water-jet or die cut for custom configurations.
- Halogen free, RoHS and REACH compliant.

Properties	Test Method	Value
Durometer	ASTM D2240	39 Shore D
Tensile Strength	ASTM D638	475 psi
Elongation	ASTM D638	31%
Surface Resistivity	ASTM D257	> 11 GΩ/□
Max Operating Temperature	--	275°F (135°C)
Flammability Rating	--	UL94 HB
Standard Sheet Thickness	--	0.060" (1.52 mm) Other thicknesses available upon request.
Color	--	Gray

Permittivity and Permeability

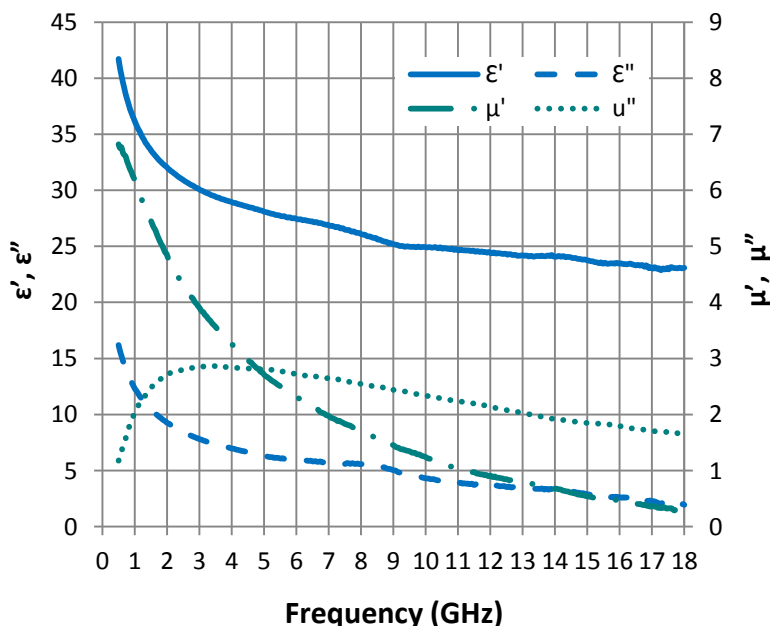

Reflection Loss

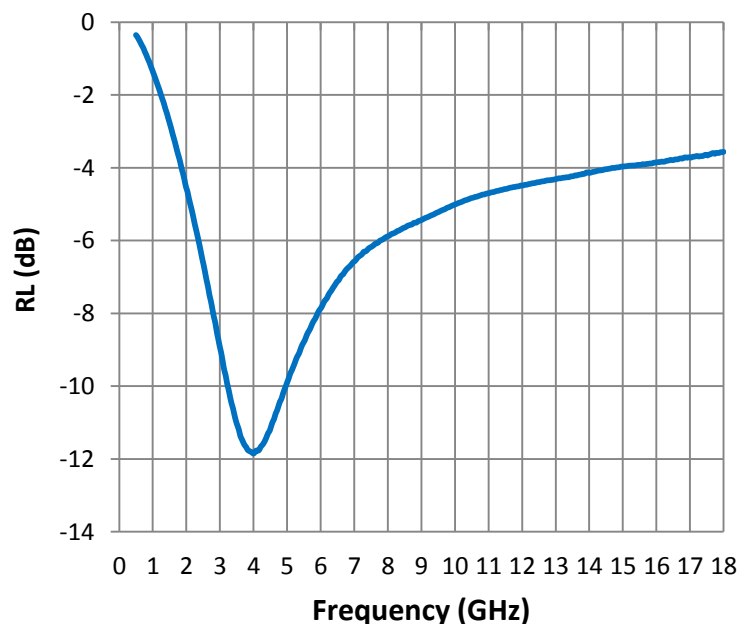

Note: the information provided is accurate at time of publication.
It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.

Supplied by:
www.hitek-ltd.co.uk
+44 (0)1724 851678



HITEK
ELECTRONIC MATERIALS LTD