

# Technical Data Sheet

## UD-12105




### Description


- Flexible, urethane-based magnetic absorber.
- Ideal for suppression in an enclosed cavity, signal isolation and surface current attenuation.
- Standard sheet size:
  - 12" x 12" (30.48 cm x 30.48 cm)
  - Other sheet sizes available upon request.
- Available with pressure sensitive adhesive (PSA).
- Can be water-jet or die cut for custom configurations.
- Halogen free, RoHS and REACH compliant.

Properties	Test Method	Value
Max Operating Temperature	--	275°F (135°C)
Flammability Rating	--	UL94 HB
Sheet Thickness	--	0.030" (0.76 mm)
Color	--	Gray

**Attenuation**

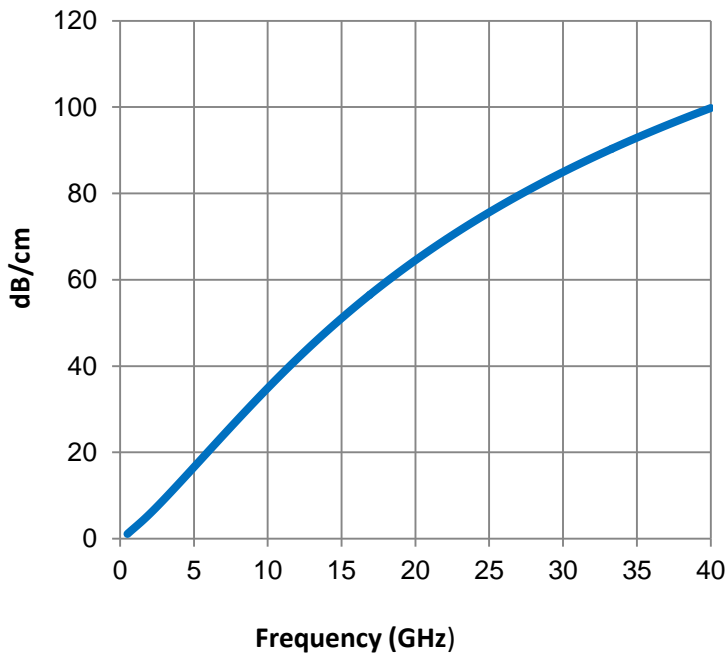

**Reflection Loss**

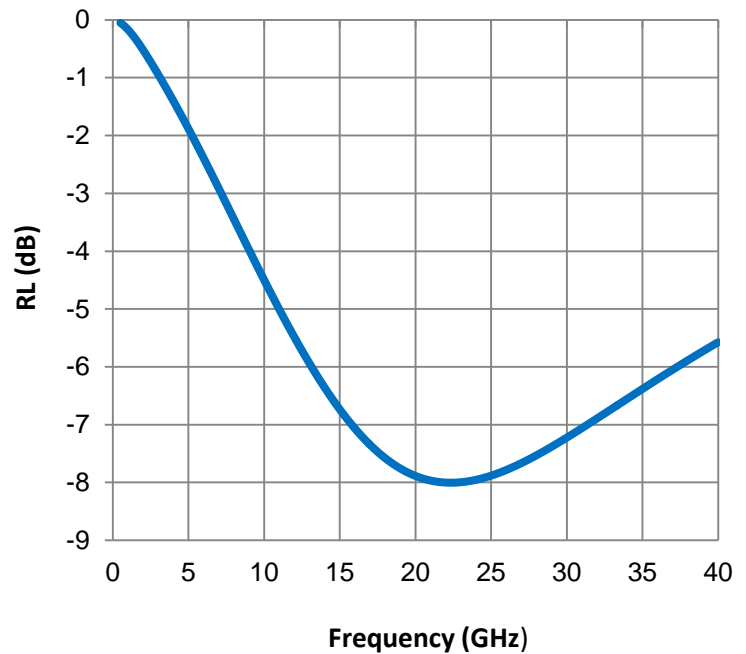

Note: the information provided is accurate at time of publication.  
It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.

Supplied by:  
[www.hitek-ltd.co.uk](http://www.hitek-ltd.co.uk)  
 +44 (0)1724 851678



**HITEK**  
ELECTRONIC MATERIALS LTD