

# Technical Data Sheet

## LS-11379



### Description

- Flexible, low density, high loss, carbon impregnated foam dielectric absorber.
- Ideal for applications requiring absorption across a wide range of frequencies, including antenna cross-talk and sidelobe reduction and cavity resonance suppression.
- Available with PSA, surface coating or ground plane.
- Can be water-jet for custom configurations.
- RoHS and REACH compliant.


### Physical Properties

<u>Properties</u>	<u>Value</u>
Sheet Thickness	1.75" (4.45 cm)
Standard Sheet Size	30" x 65" $\pm$ .250" (76.2 cm x 165.1 cm $\pm$ 6.35 mm) Others available upon request.
Color	Black

### Electrical Properties

<u>Frequency</u>	<u>Typical Insertion Loss</u>
3 GHz	- 35 dB ( $\pm$ 5)

### Insertion Loss

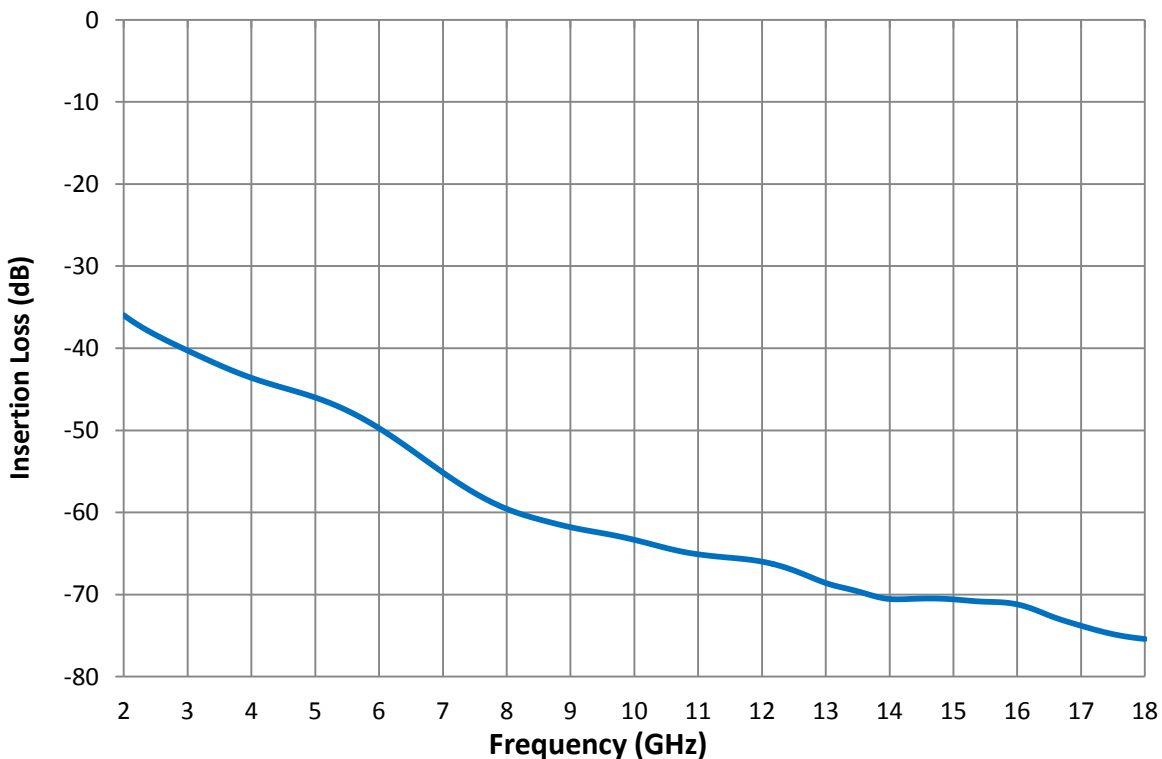

Note: the information provided is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.