

\_\_\_\_\_

# **ABS-HLE**


## Thin flexible microwave elastomer absorber

ABS-HLE is a thin urethane absorber with high loss properties. The absorber material is a non-conductive urethane based material designed for the suppression of surface currents and cavity resonance applications in the higher frequency range. The urethane based material is easy in bonding. For harsh environments and high temperature applications also the silicone based ABS-HLSE can be applied.

### **Applications:**

- Lining cavities typically to supress standing waves and surface currents, the material is not designed nor intended to be used in reflectivity mode.
- ABS-HLE is typically installed in applications above 6 GHz.
- High frequency sensor systems, LNB's, waveguides, amplifiers, oscillators are often equipped with ABS-HLE to improve RF-stability.

#### **Specifications:**

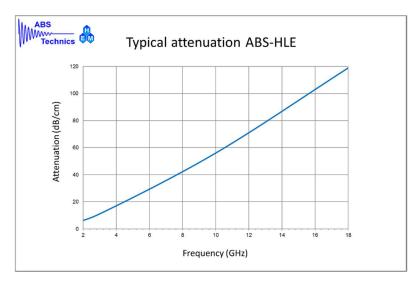

#### **Properties:**

Frequency range : > 6 GHzHardness : 80 Shore A

Maximum service temperature : -40°C up to 120°C.

- Maximum service temperature : -40 C up to 120 C.

The information in this technical data sheet is believed by ABS Technics to be accurate and reliable. ABS Technics makes no representations or warranties of any kind on this data. All specifications can be subject to change without any notice. ABS Technics shall not be liable for incidental or consequential damages of any kind due to the usage of their material. All ABS Technics products are sold pursuant to our 'Terms and Conditions of Sale".



\_\_\_\_\_

#### **Availability:**

Standard outside dimensions are: 305x305x1mm but also specific or customized thickness, sizes and shapes can be supplied.

ABS-HLE is available in several thicknesses to suite the available space in the applications.

The urethane version assures a good and easy bonding process using self-adhesive tape.

By itself the material has very high mechanical strength and excellent abrasion resistance.



The information in this technical data sheet is believed by ABS Technics to be accurate and reliable. ABS Technics makes no representations or warranties of any kind on this data. All specifications can be subject to change without any notice. ABS Technics shall not be liable for incidental or consequential damages of any kind due to the usage of their material. All ABS Technics products are sold pursuant to our 'Terms and Conditions of Sale".