

ABS-FLSE


Flexible microwave elastomer absorber

ABS-FLSE is a thin silicone absorber with magnetic loading. The absorber is applied in the lower frequency range for reduction of reflections but also for the suppression of surface currents and cavity resonances applications. The absorber sheets can be supplied with a self-adhesive backing or can be installed using an adequate liquid adhesive. Silicone material is typically used for harsh environments, high temperature applications and applications where low outgassing is a requirement.

Applications :

- ABS-FLSE is often used to line the housing of antenna systems, the absorber material will suppress both standing waves and surface currents.
- When bonded to a metal surface the material will reduce the reflectivity level of the metal object.
- Antenna elements are often equipped with ABS-FLSE to improve the antenna pattern.

Specifications :

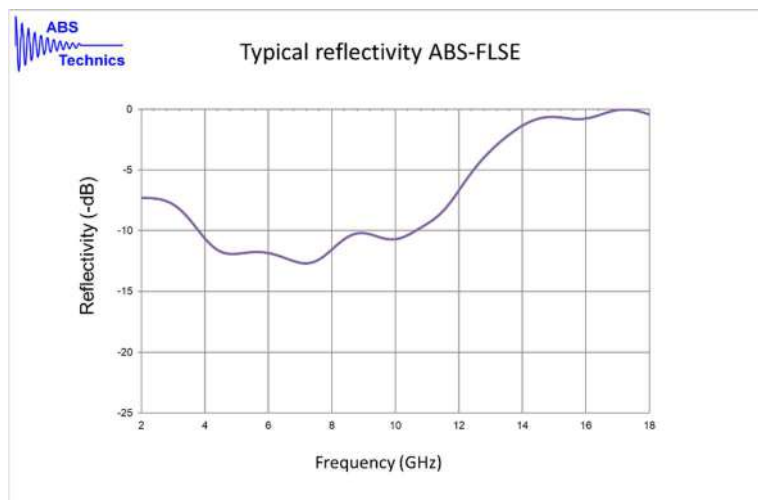

Properties :

- Frequency range : 1 GHz up to 12 GHz
- Hardness : 85 (shore A)
- Maximum service temperature : -40°C up to 170°C.

The information in this technical data sheet is believed by ABS Technics to be accurate and reliable. ABS Technics makes no representations or warranties of any kind on this data. All specifications can be subject to change without any notice. ABS Technics shall not be liable for incidental or consequential damages of any kind due to the usage of their material. All ABS Technics products are sold pursuant to our 'Terms and Conditions of Sale'.

Availability :

Standard outside dimensions are 305x305mm available thicknesses are 1, 2 and 3mm.

Also customer specific thicknesses, sizes and shapes can be produced to suite the available space in the applications.

Typically for low outgassing applications it is preferred to bond the material using a liquid silicone adhesive, in most cases a primer needs to be applied prior to the adhesive.

By itself the material has very high mechanical strength and excellent abrasion resistance.

Supplied by: www.hitek-ltd.co.uk +44 (0)1724 851678	 The Hitek logo consists of three interlocking hexagons containing the letters 'H', 'E', and 'M' in a stylized font.	HITEK ELECTRONIC MATERIALS LTD
---	---	--

The information in this technical data sheet is believed by ABS Technics to be accurate and reliable. ABS Technics makes no representations or warranties of any kind on this data. All specifications can be subject to change without any notice. ABS Technics shall not be liable for incidental or consequential damages of any kind due to the usage of their material. All ABS Technics products are sold pursuant to our 'Terms and Conditions of Sale'.