

# Technical Data Sheet

## WX-A Series




### Description


- WX-A is a combination of a highly effective magnetic absorber with the physical characteristics of a flexible elastomer.
- Low magnetic loss tangent below 20 MHz, is ideal for RFID, NFC, and wireless power charging applications.
- Above 20 MHz the high magnetic loss of WX-A makes it suitable for near-field applications requiring maximum absorption.
- Other sheet sizes and thicknesses are available upon request.
- Available with PSA, surface coating or ground plane.
- Can be water-jet or die cut for custom configurations.
- Halogen free, RoHS and REACH compliant.

Properties	Test Method	Value
Durometer	ASTM D2240	75 Shore A
Tensile Strength	ASTM D638	550 psi
Elongation	ASTM D638	20%
Surface Resistivity	ASTM D257	>0.5 MΩ/□
Standard Sheet Thickness	--	0.010" (0.254 mm) 0.020" (0.508 mm) 0.040" (1.016 mm)
Standard Sheet Size	--	12" x 12" (304.8 mm x 304.8 mm)
Color	--	Silver

Measured Complex Permeability

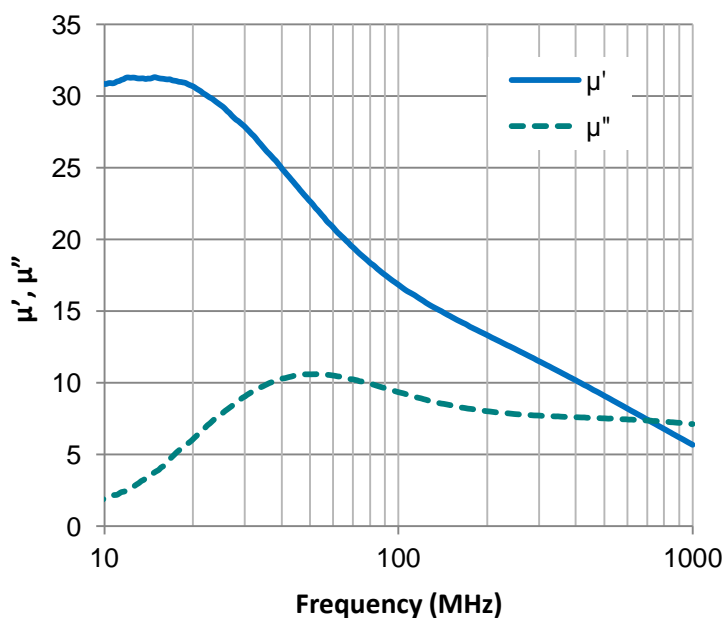


Measured Magnetic Loss Tangent

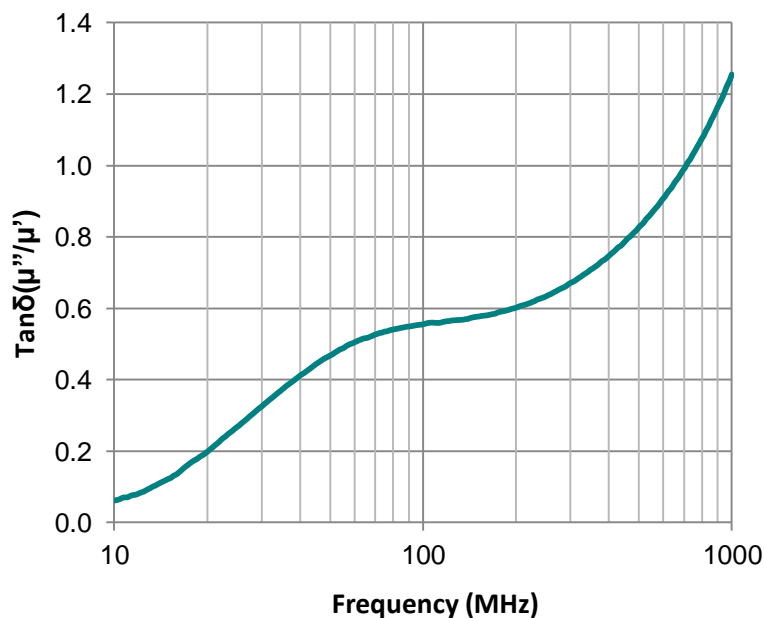

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.

# WX-A Series Electrical Data

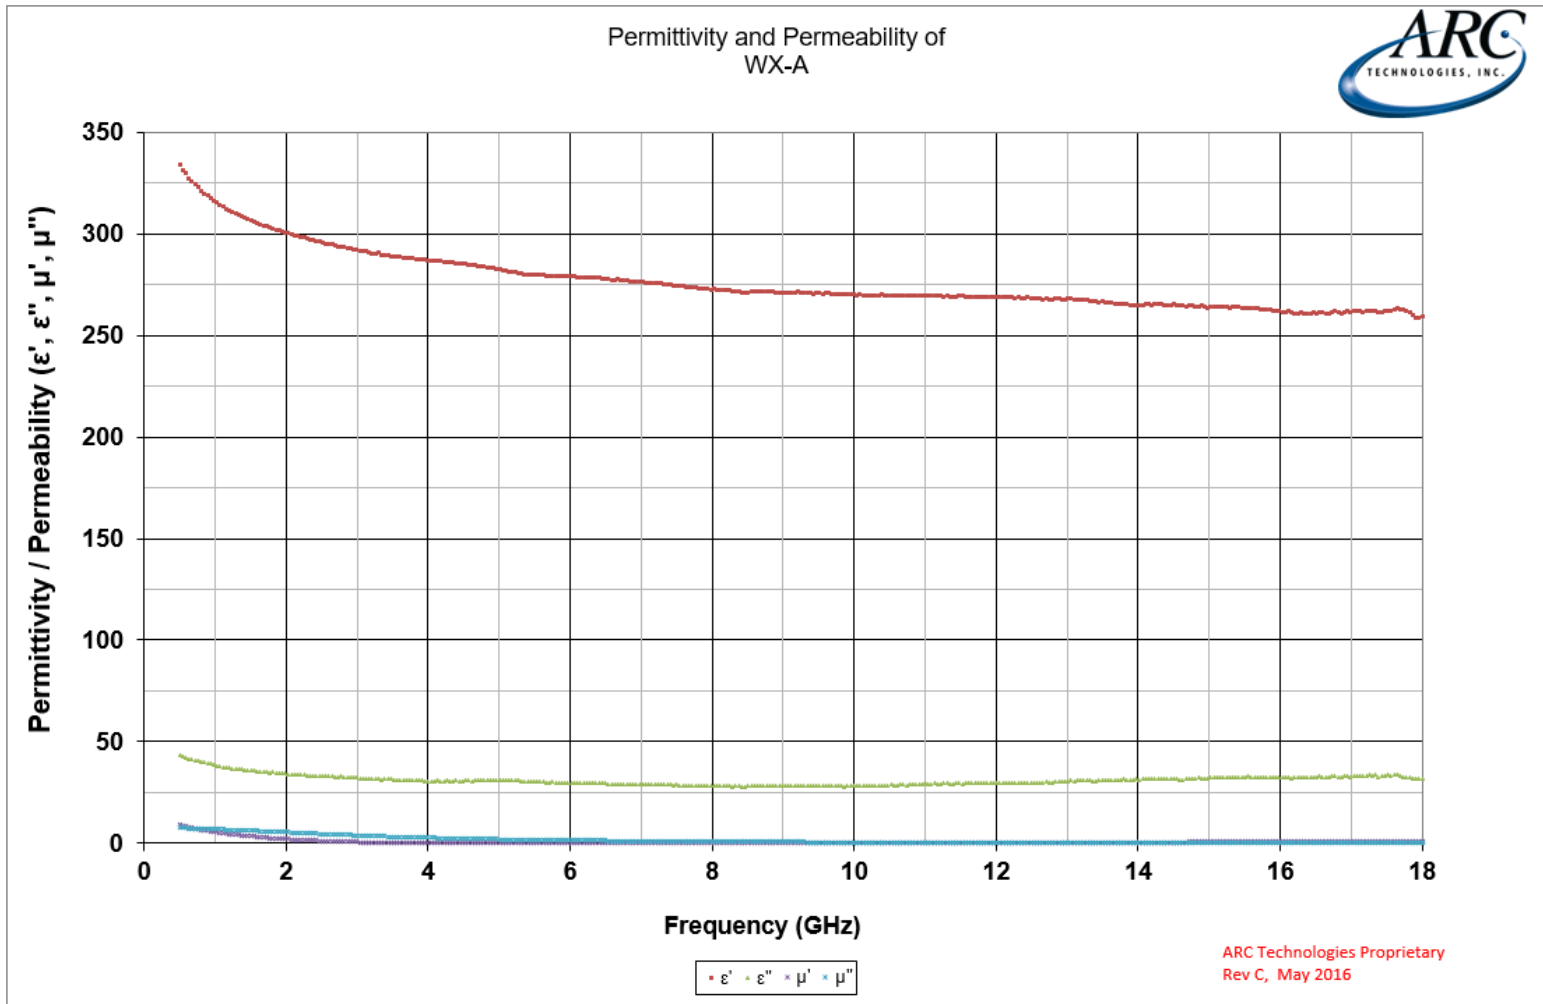

Supplied by:  
[www.hitek-ltd.co.uk](http://www.hitek-ltd.co.uk)  
+44 (0)1724 851678

**H**  
**E**  
**M**

**HITEK**  
ELECTRONIC MATERIALS LTD

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.

ARC Technologies, Inc. 37 South Hunt Road, Amesbury, MA 01913  
Phone:978-388-2993 Fax:978-388-6866 [www.arc-tech.com](http://www.arc-tech.com)